

SPRAY SERIES

E342

Spray is the most compact and versatile solution to cool, create fog effects, humidify, suppress dust and odours in small and medium sized areas. Wide variety of accessories and types of lines configurable as required. The best compromised between price/quality.

10 YEARS
GUARANTEE

24H



105 Bar



<50dB

5 MICRON FILTER

PAINTED STEEL HANDLE
FOR EASY TRANSPORTATIONDIGITAL
CYCLING TIMERHIGH PRESSURE RELEASE
SOLENOID VALVE

DRAIN
BUILT-IN SYSTEM
NOT NEED
EXTERNAL
DISCHARGE

BACK CONNECTOR
FOR FANS AND REMOTE COMNTACT

AXA SIMMM PUMP
900 RPM MOTOR < 50 dB
OPTIMIZED FOR INDUSTRIAL
INSTALLATIONS



FLOW RATE VALVE
(PRESSURE REGULATOR)

INLINE SOLENOID VALVE



VIDEO



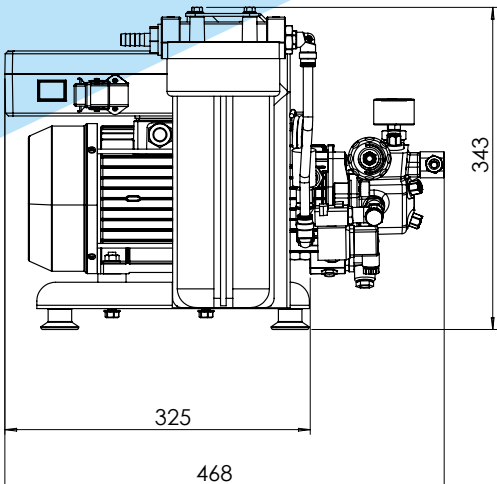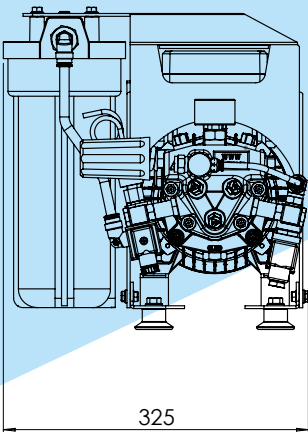

TECHNICAL DATA

- SIMMM pump AXA model with no overheating system (CE approved)
- Patented flow rate valve (large range of nozzle numbers with the same model)
- Max working pressure up to 105 bar
- Professional gauge
- Water seals in viton
- Coated ceramic piston
- SS valves
- Safety water pressure switch (water loss)
- In line low pressure solenoid valve
- High pressure release solenoid valve
- “H” class motor with 900 rpm
- Thermal protection
- Lowest noise level 50 dB
- Painted steel frame
- Electric plug as standard
- External misting fan socket (230 volt-10 A)



MODEL	E342
PRESSIONE (BAR)	70-105
NOZZLES NUMBER (0.2 MM)	10-70
PUMP	SIMMM AXA
MIN FLOW RATE (LT/MIN)	1
MAX FLOW RATE (LT/MIN)	5
MOTOR SPEED (RPM)	900
VOLTAGE (VOLT)	230/115 50/60Hz.*
POWER (KW/H)	0.92
MAX DAILY USE (HOURS)	24
WEIGHT (KG)	28
DIMENSIONS LXHXP (CM)	47x32x34

* ON REQUEST