



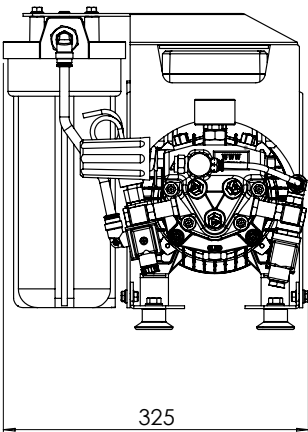

TECHNICAL DATA

- SIMMM pump AXA model with no overheating system (CE approved)
- Patented flow rate valve (large range of nozzle numbers with the same model)
- Max working pressure up to 105 bar
- Professional gauge
- Water seals in viton
- Coated ceramic piston
- SS valves
- Safety water pressure switch (water loss)
- In line low pressure solenoid valve
- High pressure release solenoid valve
- “H” class motor with 900 rpm
- Thermal protection
- Lowest noise level 50 dB
- Painted steel frame
- Electric plug as standard
- External misting fan socket (230 volt-10 A)

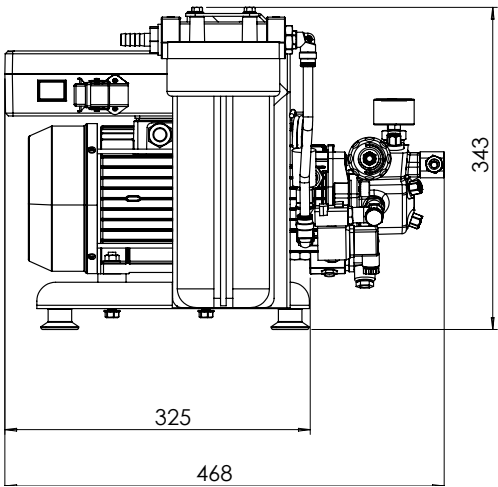

MODEL	E342
PRESSIONE (BAR)	70-105
NOZZLES NUMBER (0.2 MM)	70
PUMP	SIMMM AXA
MIN FLOW RATE (LT/MIN)	1
MAX FLOW RATE (LT/MIN)	5
MOTOR SPEED (RPM)	900
VOLTAGE (VOLT)	230/115 50/60Hz.*
POWER (KW/H)	0.92
MAX DAILY USE (HOURS)	24
WEIGHT (KG)	28
DIMENSIONS LXHXP (CM)	47x32x34

* ON REQUEST